

MIXER DATA SHEET

Customer Name: PIE
 Quantity: 1
 Model No: -
 P.O. No. _____
 Tank or Tag No: T-136
 Jobsite: TERMINAL Kiryat Haim
 Tank Diameter: ~61
 Tank Height: ~20 (Fuel level 19)
 Tank capacity: 55,000
 Vari-Angle Mixer: ☒
 Fixed Angle Mixer: ☐
 Actuator: ☐

MOTOR INFORMATION:

Motor to be Supplied by Vendor: ☒
 Motor to be Supplied by Customer: ☐
 1.Horsepower: _____
 2.R.P.M.: _____
 3.50Hz ☒
 4.Voltage: 400 V
 5.Enclosure: IP 55
 6.Frame Number: _____
 7.Motor Manufacturer: _____
 8.Specials (Space Heaters, _____
 Insulation Class, etc.) : _____
NO


BS&W CONTROL: ☐ BLENDING: ☒ BOTH: ☐
 Fluid to be Mixed CRUDE OIL
 Specific Gravity 0,78-0,95
 Visc@Temp. cP or cSt 3-30 cSt

Top Bolt Location

On Vertical Centerline. ☐

Holes Straddle Vertical Centerline Equally. ☒

Offset Hole.
 Top Hole (in\mm)
 to the right of Centerline. ☐

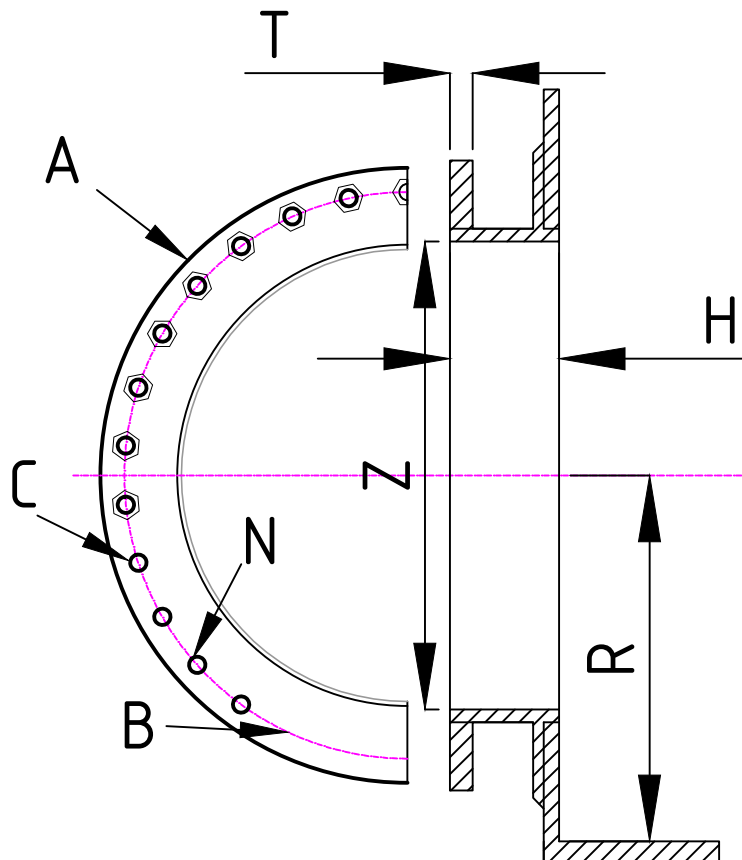

A = Flange Outside Diameter: 990 mm
 B = Bolt Circle Diameter: 910 mm
 C = Bolt Hole Diameter: 20 mm
 N = Numbers of Holes: 42
 T = Flange Thickness: 18
 R = Manway Centerline to Tank Floor: 770-780
 H = Depth of Manway: 188
 Z = Inside Diameter of Manway: 760

APVD BY: _____
 DATE: _____
 REVISION: _____

EK
 001